



STATE OF IDAHO
DIVISION OF
ENVIRONMENTAL QUALITY

RECEIVED

MAY 22 2000

DIV. OF ENVIRONMENTAL QUALITY
STATE A Q PROGRAM

224 South Arthur • Pocatello, Idaho 83204-3202 • (208) 236-6160

Dirk Kempthorne, Governor
C. Stephen Allred, Administrator

May 19, 2000

CERTIFIED MAIL # P 562 927 158

Mike Horrocks
Owner
Horrocks Ready Mix
577 Frontage Road
Blackfoot, ID 83221

RE: P-000301, Horrocks Ready Mix, Portable
(Portable Concrete Batch Plant, Permit to Construct No. 777-00257)

Dear Mr. Horrocks:

On February 7, 2000, the Idaho Department of Health and Welfare, Division of Environmental Quality (DEQ) received a Permit to Construct (PTC) application from Horrocks Ready Mix for a portable concrete batching facility. On March 20, 2000, the application was declared complete. The facility is to be initially located at Blackfoot, Idaho. Based on review of the application and all applicable state and federal rules and regulations, DEQ finds that this project meets the provisions of IDAPA 16.01.01.200 (*Rules for the Control of Air Pollution in Idaho*). Enclosed is PTC No. 777-00257 for the portable concrete batching facility.

Enclosed is a copy of the portable equipment relocation form that is required to be completed and submitted to DEQ at least ten (10) days prior to relocation of any equipment covered by this permit. Also enclosed are copies of maps showing all nonattainment areas within the State of Idaho.

This permit does not release the Permittee from compliance with all other applicable federal, state, local, or tribal laws, regulations, or ordinances. With regard to collocation with another portable facility, conservative assumptions were used to derive the throughput limitations. If this throughput is too restrictive for a particular project, contact DEQ prior to collocation and request a detailed site-specific analysis.

Please pay particular attention to the reporting requirements contained in Paragraph E of the General Provisions section of the permit. This information is needed to properly track the progress of the permit. Please refer to the appropriate permit number when submitting reports required in the Reporting Requirements section of the permit.

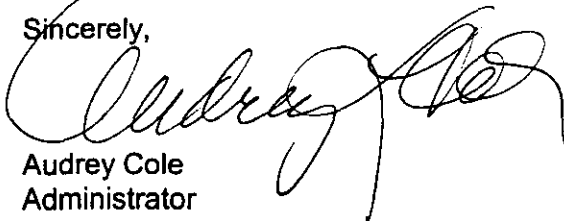
You are strongly encouraged to request a meeting with DEQ to discuss the permit terms and requirements with which your facility must comply. Mr. Rick Elkins of the Pocatello Regional Office will contact you regarding this meeting. DEQ strongly recommends that, in addition to your facility's plant manager, your responsible official, environmental contact, and any operations staff responsible for day-to-day compliance with permit conditions also attend the meeting.

Mike Horrocks
May 19, 2000
Page 2

You, as well as any other entity, may have the right to appeal this final agency action pursuant to the Idaho Department of Health and Welfare Rules, Title 5, Chapter 3, "Rules Governing Contested Case Proceedings and Declaratory Rulings," by filing a petition with the Hearings Coordinator, Department of Health and Welfare, Administrative Procedures Section, 450 West State Street, Tenth Floor, Boise, Idaho 83720-5450, within thirty-five (35) days of the date of this decision. However, DEQ encourages you to contact the State Air Quality Permit Program to address any concerns you may have with the enclosed permit prior to filing a petition for a contested case.

If you have any questions regarding the terms or conditions of the enclosed permit, contact Rick Elkins at (208) 236-6160.

Sincerely,

A handwritten signature in black ink, appearing to read "Audrey Cole", written over a large, faint circular stamp or watermark.

Audrey Cole
Administrator
Pocatello Regional Office

DH/hs 86387 C:\WINDOWS\TEMP\000301.PL

cc: Pocatello RO
EPA-100
DEQ State Office

STATE OF IDAHO

PERMIT TO CONSTRUCT
AN AIR POLLUTION
EMITTING SOURCE

PERMIT NUMBER

7 7 7 - 0 0 2 5 7

AQCR

CLASS

B

SIC

3 2 7 3

ZONE

UTM COORDINATE (km)

1. PERMITTEE

Horrocks Ready Mix

2. PROJECT

Portable Concrete Batch Plant

3. MAILING ADDRESS

577 Frontage Road

CITY

Blackfoot

STATE

Idaho

ZIP CODE

83221

4. SITE LOCATION COUNTY

Portable

NO. OF FULL-TIME EMPLOYEES

16

PROPERTY AREA AT SITE (Acreage)

Varies

5. PERSON TO CONTACT

Mike Horrocks

TITLE

Owner

TELEPHONE

(208) 785-6426

6. EXACT PLANT LOCATION

Portable

7. GENERAL NATURE OF BUSINESS & KINDS OF PRODUCTS

Concrete Production (Including Aggregate, Asphalt, and Concrete Production when Collocated)

8. GENERAL CONDITIONS

This permit is issued according to the *Rules for the Control of Air Pollution in Idaho*, Section 16.01.01.200, and pertains only to emissions of air contaminants that are regulated by the State of Idaho and to the sources specifically allowed to be constructed by this permit.

This permit (a) does not affect the title of the premises upon which the equipment is to be located, (b) does not release the Permittee from any liability for any loss due to damage to person or property caused by, resulting from, or arising out of the design, installation, maintenance, or operation of the proposed equipment, (c) does not release the Permittee from compliance with other applicable federal, state, tribal, or local laws, regulations, or ordinances, (d) in no manner implies or suggests that the Idaho Department of Health and Welfare, Division of Environmental Quality (DEQ) or its officers, agents, or employees, assumes any liability, directly or indirectly, for any loss due to damage to person or property caused by, resulting from, or arising out of design, installation, maintenance, or operation of the proposed equipment.

This permit is not transferable to another person, place, piece or set of equipment. This permit will expire if construction has not begun within two years of its issue date or if construction is suspended for one year.

This permit has been granted on the basis of design information presented with its application. Changes of design or equipment may require Department approval pursuant to the *Rules for the Control of Air Pollution in Idaho*, IDAPA 16.01.01.200, et seq.


ADMINISTRATOR, POCATELLO REGIONAL OFFICE
DIVISION OF ENVIRONMENTAL QUALITY

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

PERMIT NUMBER

Horrocks Ready Mix
Concrete Batch Plant
Portable

777 - 00257

SOURCE

Portable Concrete Batch Plant

A. STATEWIDE REQUIREMENTS

The Permittee shall comply with the following sourcewide conditions when the concrete batching facility is operated anywhere (nonattainment, attainment, or unclassifiable areas) within the State of Idaho.

A.1 EMISSION LIMITS

A.1.1 Opacity Limit

Emissions emanating from any stack, vent, or other functionally equivalent opening, shall not exceed twenty percent (20%) opacity for a period or periods aggregating more than three (3) minutes in any sixty (60) minute period as required in IDAPA 16.01.01.625 (*Rules for the Control of Air Pollution in Idaho*). Opacity shall be determined using the procedures contained in IDAPA 16.01.01.625.

A.1.2 Visible Emission Limits at Property Boundary

Fugitive emissions shall not be observed leaving the property boundary for a period or periods aggregating more than three (3) minutes in any sixty (60) minute period. Visible emissions shall be determined by Method 22, as described in 40 CFR Part 60, Appendix A, or a DEQ-approved alternative method.

A.2 OPERATING REQUIREMENTS

A.2.1 Reasonable Control of Fugitive Emissions

All reasonable precautions shall be taken to prevent particulate matter from becoming airborne as required in IDAPA 16.01.01.651. In determining what is reasonable, considerations will be given to factors such as the proximity of dust-emitting operations to human habitations and/or activities and atmospheric conditions which might affect the movement of particulate matter. Some of the reasonable precautions include, but are not limited to, the following:

A.2.1.1 Use, where practical, of water or chemicals for control of dust in the demolition of existing buildings or structures, construction operations, the grading of roads, or the clearing of lands;

A.2.1.2 Application, where practical, of asphalt, oil, water or suitable chemicals to, or covering of, dirt roads, material stockpiles, and other surfaces which can create dust;

A.2.1.3 Installation and use, where practical, of hoods, fans and fabric filters or equivalent systems to enclose and vent the handling of dusty materials. Adequate containment methods should be employed during sandblasting or other operations;

A.2.1.4 Covering, where practical, of open-bodied trucks transporting materials likely to give rise to airborne dusts;

A.2.1.5 Paving of roadways and their maintenance in a clean condition, where practical; or

A.2.1.6 Prompt removal of earth or other stored material from streets, where practical.

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

PERMIT NUMBER

Horrocks Ready Mix
Concrete Batch Plant
Portable

777 - 00257

SOURCE

Portable Concrete Batch Plant

A.2.2 Operations and Maintenance Manual Requirements

Within sixty (60) days after startup, the Permittee shall have developed an Operations and Maintenance (O&M) Manual for the air pollution control device which describes the procedures that shall be followed to comply with General Provision B and the air pollution control device requirements contained in this permit. The manual shall remain on site at all times and shall be made available to DEQ representatives upon request.

A.2.3 Monitoring Equipment

The Permittee shall install, calibrate, maintain, and operate, in accordance with manufacturer's specifications, equipment to measure the pressure differential across the air pollution control equipment.

A.2.4 Pressure Drop Across Air Pollution Control Device

The pressure drop across the air pollution control device shall be maintained within the manufacturer's and O&M Manual's specifications. Documentation of both manufacturer's and O&M Manual's operating pressure drop specifications shall remain on site at all times and shall be made available to DEQ representatives upon request.

A.3. MONITORING REQUIREMENTS

A.3.1 Operating Parameters

The following operating parameters shall be monitored and recorded. The most recent two (2) years' compilation of data shall be kept on site, in a log, and shall be made available to DEQ representatives upon request.

A.3.1.1 Pressure drop reading across the air pollution control device once per week.

A.3.1.2 Concrete production in cubic yards per day (cy/day).

A.3.1.3 Location of the concrete batching facility (attainment, unclassifiable, attainment-collocated, or nonattainment) on a daily basis.

A.3.2 Reasonable Control Measures

The Permittee shall monitor and record in a log, during operation, the periodic method(s) used to reasonably control fugitive emissions from this facility. The log shall include the type of control used (e.g., water, environmentally safe chemical dust suppressants, etc.) as well as the circumstances under which no controls are used. The most recent two (2) years' compilation of data shall be kept on site and shall be made available to DEQ representatives upon request.

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

PERMIT NUMBER

7 7 7 - 0 0 2 5 7

Horrocks Ready Mix
Concrete Batch Plant
Portable

SOURCE

Portable Concrete Batch Plant

A.4. REPORTING REQUIREMENTS

A.4.1 Relocation

All existing portable equipment shall be registered, and at least ten (10) days prior to relocation of any equipment covered by this permit, the Permittee shall report to DEQ, on registration/relocation forms supplied by DEQ in accordance with IDAPA 16.01.01.500, including the following information:

A.4.1.1 Exact location of the new site of operations;

A.4.1.2 Startup date at the new site of operations and the duration of operations at the new site;

A.4.1.3 Equipment to be used at the new site;

A.4.1.4 A scaled plot plan clearly showing the property boundary of the new site; and

A.4.1.5 Other permitted portable sources that the unit will be collocated with at the new site of operations (i.e., hot-mix asphalt plant, cement plant, or rock crusher).

A.4.2 Certification of Documents

All documents including, but not limited to, application forms for Permits to Construct, monitoring data, supporting information, requests for confidential treatment, testing reports, and compliance certifications submitted to DEQ shall contain a certification by a responsible official in accordance with IDAPA 16.01.01.123. The certification shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document(s) are true, accurate, and complete.

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

Horrocks Ready Mix
Concrete Batch Plant
Portable

PERMIT NUMBER

777 - 00257

SOURCE

Portable Concrete Batch Plant

B. ATTAINMENT OR UNCLASSIFIABLE AREA REQUIREMENTS WHEN NOT COLLOCATED

The Permittee shall comply with the conditions in Section A of this permit and the following permit conditions when the concrete batching facility is operated in any attainment or unclassifiable areas, and when it is not collocated, within the State of Idaho.

B.1 OPERATING REQUIREMENTS**B.1.1 Facility Throughput Limits**

The production rate of the concrete batching facility is unlimited while operating in any attainment or unclassifiable area.

B.1.2 Collocation Requirements

When the concrete batching facility is to be collocated with another portable concrete batch plant, rock crushing plant, or hot-mix asphalt plant, the collocation requirements of Section C of this permit must be complied with.

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

PERMIT NUMBER

Horrocks Ready Mix
Concrete Batch Plant
Portable

7 7 7 - 0 0 2 5 7

SOURCE

Portable Concrete Batch Plant

C. ATTAINMENT OR UNCLASSIFIABLE AREA REQUIREMENTS WHEN COLLOCATED

The Permittee shall comply with the conditions in Section A of this permit and the following permit conditions when the concrete batching facility is to be collocated with another portable concrete batch plant, rock crushing plant, or hot-mix asphalt plant within the State of Idaho. The concrete batching facility may only collocate with either one (1) portable rock crushing plant, one (1) portable hot-mix asphalt plant, or one (1) other portable concrete batch plant which has been permitted to specifically allow collocation.

C.1 OPERATING REQUIREMENTS

C.1.1 Collocation Areas

The concrete batching facility may collocate in attainment or unclassifiable areas only. The Permittee shall not collocate in a nonattainment area or proposed nonattainment area without obtaining a Permit which specifically allows for collocation in a nonattainment area.

C.1.2 Number of Portable Sources

The concrete batching facility may only collocate with either one (1) portable rock crushing plant, one (1) portable hot-mix asphalt plant, or one (1) other portable concrete batch plant which has been permitted to specifically allow collocation.

C.1.3 Facility Throughput Limits

The production rate of the concrete batching facility shall not exceed a maximum of two hundred sixty-two thousand, eight hundred cubic yards per any consecutive 12-month period (262,800 cy/yr) when collocated with another concrete batch plant, rock crushing plant, or hot-mix asphalt plant.

DATE: May 19, 2000

**PERMIT TO CONSTRUCT
PERMITTEE, PROJECT, AND LOCATION**

PERMIT NUMBER

7 7 7 - 0 0 2 5 7

Horrocks Ready Mix
Concrete Batch Plant
Portable

SOURCE

Portable Concrete Batch Plant

D. NONATTAINMENT AREA REQUIREMENTS

The Permittee shall comply with the conditions in Section A of this permit and the following permit conditions when the concrete batching facility is operated in any PM-10 nonattainment areas within the State of Idaho. While operating the concrete batching facility under the conditions set forth in Section D, the concrete batching facility may not collocate with any other facility.

D.1 OPERATING REQUIREMENTS

D.1.1 Facility Throughput Limits

The production rate of the concrete batching facility is unlimited while operating in any PM-10 nonattainment area or proposed PM-10 nonattainment area.

D.1.2 Collocation Requirements

The concrete batching facility shall not be collocated with another portable concrete batch plant, rock crushing plant, or hot-mix asphalt plant when located in any PM-10 nonattainment area or proposed PM-10 nonattainment area.

DATE: May 19, 2000

PERMIT TO CONSTRUCT GENERAL PROVISIONS

- A. All emissions authorized herein shall be consistent with the terms and conditions of this permit and the *Rules for the Control of Air Pollution in Idaho*. The emission of any pollutant in excess of the limitations specified herein, or noncompliance with any other condition or limitation contained in this permit, shall constitute a violation of this permit and the *Rules for the Control of Air Pollution in Idaho*, and the Environmental Protection and Health Act, Idaho Code 39-101, et.seq.
- B. The Permittee shall at all times (except as provided in the *Rules for the Control of Air Pollution in Idaho*) maintain in good working order and operate as efficiently as practicable, all treatment or control facilities or systems installed or used to achieve compliance with the terms and conditions of this permit and other applicable Idaho laws for the control of air pollution.
- C. The Permittee shall allow the Director, and/or the authorized representative(s), upon the presentation of credentials:
1. To enter at reasonable times upon the premises where an emission source is located, or in which any records are required to be kept under the terms and conditions of this permit; and
 2. At reasonable times to have access to and copy any records required to be kept under the terms and conditions of this permit, to inspect any monitoring methods required in this permit, and require stack emission testing in conformance with IDAPA 16.01.01.157 when deemed appropriate by the Director.
- D. Nothing in this permit is intended to relieve or exempt the Permittee from compliance with any applicable federal, state, or local law or regulation, except as specifically provided herein.
- E. The Permittee shall notify DEQ, in writing, of the required information for the following events within five (5) working days after occurrence:
1. Initiation of Construction - Date
 2. Completion/Cessation of Construction - Date
 3. Actual Production Start-up - Date
 4. Initial Date of Achieving Maximum Production Rate - Production Rate and Date
- F. If emission testing is specified, the Permittee must schedule such testing within sixty (60) days after achieving the maximum production rate, but not later than one hundred and eighty (180) days after initial startup. Such testing must **strictly** adhere to the procedures outlined in IDAPA 16.01.01.157 and shall not be conducted on weekends or state holidays without prior written DEQ approval. Testing procedures and specific time limitations may be modified by DEQ by prior negotiation if conditions warrant adjustment. DEQ shall be notified at least fifteen (15) days prior to the scheduled compliance test. Any records or data generated as a result of such compliance test shall be made available to DEQ upon request.
- The maximum allowable operating rate shall be limited to 120% of the average operating rate attained during any performance test period, for which a test protocol has been granted prior approval by DEQ, unless (1) the test demonstrates noncompliance, (2) a more restrictive operating limit is specified elsewhere in this permit, or (3) at such an operating rate, emissions would exceed any emission limit(s) set forth in this permit.
- G. The provisions of this permit are severable, and if any provision of this permit to any circumstance is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

DATE: May 19, 2000
